

**1U-4Bay Non-RAID Enclosure,
Native SATA
w/ 1*Multilane(SATAII X4) Connector**



User's Manual

1. Product Overview


| | |
|--|--|
| Features: <ul style="list-style-type: none"> * Aluminum housing, anodized surface, benefits for cooling and durability * Small, compact, and light weight * Backplane design for four removable SATA drive trays * Two hot-swappable cooling fans for self-contained ventilation * Individual key lock of each HDD tray for physical security * LED indicators for power and activity on each HDD tray * Environmental monitoring with FAN/TEMP LED indicators and MUTE button | |
| Descriptions: <p>It is a four Bay Hot-Swap Serial ATA Enclosure featuring environmental monitoring. It provides a low cost and high performance external data backup solution; It will bring the convenience of data back up ability by SATA interface.</p> | |
| Specifications: | |
| Host Interface | SATAII |
| HDD Interface | SATAI/II |
| Data Transfer Rate | 3.0 Gbps |
| Hot-Swap | Both on Host and Device |
| LED Display | White – Power on indicator Blue – Busy (HDD Accessing) indicator |
| Alarm | Mutable buzzer for FAN/TEMP error. |
| LED Display for Environmental Monitoring | POWER on LED - white FAN normal – green; fail – red (too slow rpm or stop) TEMP normal – green; over 55°C – red ※ We strongly recommend customers to replace a new fan ASAP after the fan failed. |
| Cooling | Two 75 x 75 x 28 mm Cooling Fans |
| Dimension | (L): 45.3cm (W): 48.2cm (H): 4.40cm |
| Material | Anodized Aluminum & Plastic tray face |
| Power Supply | 150W Input: 90 – 230 VAC 50- 60 Hz |

| | |
|--|-------------------------|
| | Output: +5V and +12V DC |
| O.S. support | OS independent |
| Package Content: <ul style="list-style-type: none">- Enclosure x 1- HDD Tray x 4- Multilane Cable (Optional) x 1- Power Cord x 1- Manual CD-ROM x1- Hard Disk Drive mounting screw x 16- Key for HDD tray x 2 | |

2. Quick Installation Guide



- Connect Multilane cable from Host to DEVICE.
- Connect power cord.
- Turn on power switch, then you can start playing this unit.

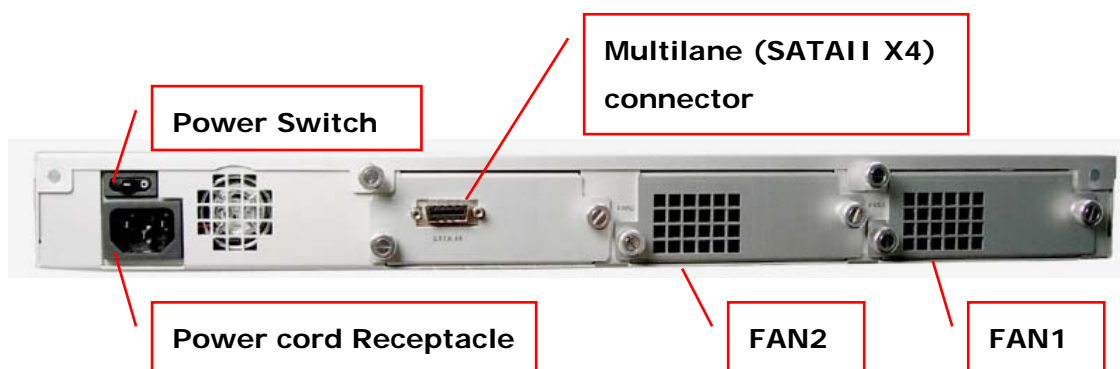

3. About Multilane Solution

Features and Benefits:

- One cable covering four channels' performance (Max. 10.0G per cable)
- Bandwidth won't be shared by other HDD
- Screw type connector ensure the tightness for secure data transference

